

# LIGHTWAY 3 / OPAL RECESSED TRIMLESS

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls



## Luminaire

**Application:** Ambient  
**Body Material:** Extruded aluminium  
**Cutout:** Cutout: length + 3mm / width 40mm / depth 82.5mm


## Optics

**Surface Diffuser:** Acrylic Opal Diffusing Lens



## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curve



LOR: 61.7%

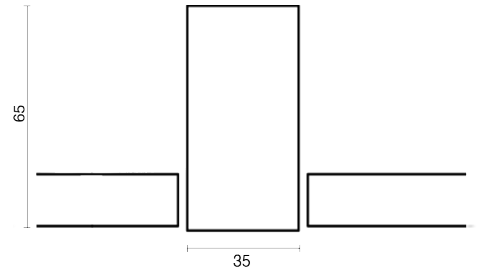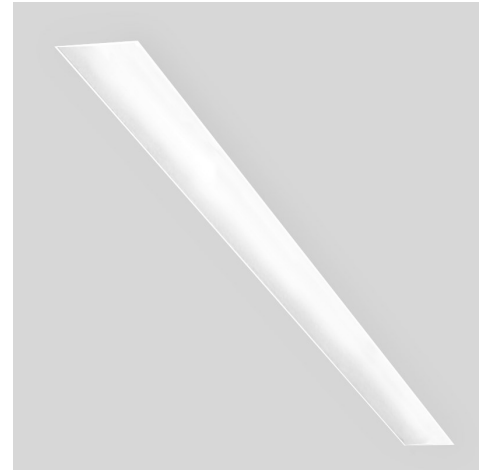

We reserve the right to make technical changes without prior notice

# LIGHTWAY 3 / OPAL RECESSED TRIMLESS

## Code Index:

<u>L 3</u>	<u>I</u>	<u>R T</u>	<u>A O</u>	<u>X X</u>	<u>-----</u>	<u>-</u>	<u>2 0</u>	<u>W S</u>	<u>I</u>	<u>---</u>	<u>-</u>
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	C				30	I
					927L2	D				60	B
					927L3	E				90	M
					930L1					120	E
					930L2					150	
					930L3					180	
					940L1					210	
					940L2					240	
					940L3					270	
					9TWT1					300	
					9TWT2						
					9TWT3						

Family	Environment	Mounting	Optic	Beam Angle
L3 Lightway 3	I Indoor	RT Recessed Trimless	AO Opal Diffuser	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Layout
<p>LED Load initial Lumen</p> <p>2700°K  <b>927L1:</b> 10 W/m 1200 lm/m  <b>927L2:</b> 15 W/m 1650 lm/m  <b>927L3:</b> 22 W/m 2150 lm/m</p> <p>3000°K  <b>930L1:</b> 10 W/m 1350 lm/m  <b>930L2:</b> 15 W/m 1900 lm/m  <b>930L3:</b> 22 W/m 2550 lm/m</p> <p>4000°K  <b>940L1:</b> 10 W/m 1450 lm/m  <b>940L2:</b> 15 W/m 2050 lm/m  <b>940L3:</b> 22 W/m 2700 lm/m</p> <p>Tunable White  <b>9TWT1:</b> 10 W/m 1350 lm/m  <b>9TWT2:</b> 15 W/m 1850 lm/m  <b>9TWT3:</b> 22 W/m 2450 lm/m</p>	<p>C Built-in driver, non-dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p>	20 IP20	WS White Smooth	II Shape

Length	Wiring
30 30 cm	I Individual
60 60 cm	B Beginning
90 90 cm	M Middle
120 120 cm	E End
150 150 cm	
180 180 cm	
210 210 cm	
240 240 cm	
270 270 cm	
300 300 cm	

## Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

We reserve the right to make technical changes without prior notice