


# LIGHTWAY 3 / OPAL RECESSED WITH TRIM

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls

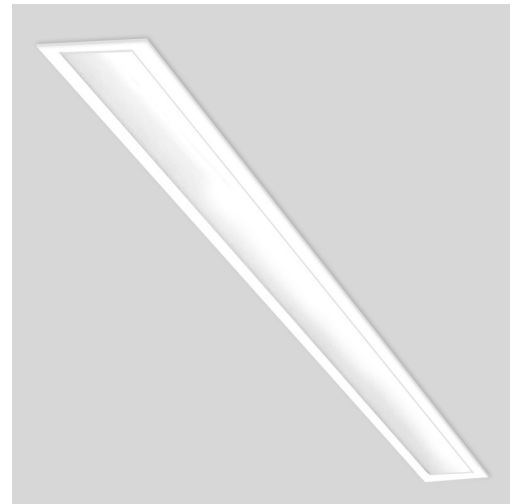

## Luminaire

**Application:** Ambient  
**Body Material:** Extruded aluminium  
**Cutout:** Cutout: length - 11mm / width 38mm / depth 51mm


## Optics

**Surface Diffuser:** Acrylic Opal Diffusing Lens


## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curves



Opal LOR: 61.7%

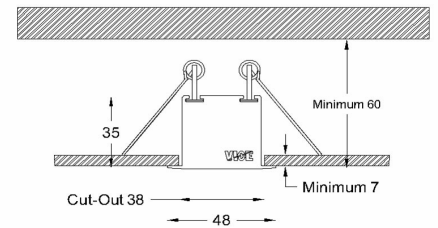

We reserve the right to make technical changes without prior notice

# LIGHTWAY 3 / OPAL RECESSED WITH TRIM

## Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>A O</u>	<u>X X</u>	-----	-	<u>2 0</u>	--	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	J		BS		30	I
					927L2	K		BT		60	B
					927L3	L		WS		90	M
					930L1	M		WT		120	E
					930L2			GS		150	
					930L3					180	
					940L1					210	
					940L2					240	
					940L3					270	
					9TWT1					300	
					9TWT2						
					9TWT3						

**Family**  
L3 Lightway 3

**Environment**  
I Indoor

**Mounting**  
RW Recessed With Trim

**Optic**  
AO Opal Diffuser

**Light Distribution**  
XX N/A

## Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

### CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927L1:	10 W/m	1500 lm/m
	927L2:	14 W/m	2100 lm/m
	927L3:	20 W/m	2900 lm/m
3000°K	930L1:	10 W/m	1600 lm/m
	930L2:	14 W/m	2170 lm/m
	930L3:	20 W/m	3000 lm/m
4000°K	940L1:	10 W/m	1650 lm/m
	940L2:	14 W/m	2300 lm/m
	940L3:	20 W/m	3150 lm/m
Tunable White	9TWT1:	10 W/m	1500 lm/m
	9TWT2:	14 W/m	2100 lm/m
	9TWT3:	20 W/m	2900 lm/m
80-2700	827L1:	10 W/m	1770 lm/m
	827L2:	14 W/m	2500 lm/m
	827L3:	20 W/m	3450 lm/m
	827L4:	31 W/m	5000 lm/m
80-3000	830L1:	10 W/m	1800 lm/m
	830L2:	14 W/m	2600 lm/m
	830L3:	20 W/m	3500 lm/m
	830L4:	31 W/m	5100 lm/m
80-4000	840L1:	10 W/m	1900 lm/m
	840L2:	14 W/m	2700 lm/m
	840L3:	20 W/m	3700 lm/m
	840L4:	31 W/m	5300 lm/m

### Control

J Non-dimmable  
K DALI Dimmable  
L 1-10V Dimmable  
M Remote driver, Phase dimming

### IP

20 IP20

### Body Finish

BS Black Smooth  
BT Black Fine Textured  
WS White Smooth  
WT White Textured  
GS Gray Smooth

### Layout

I I Shape

### Length

30 30 cm  
60 60 cm  
90 90 cm  
120 120 cm  
150 150 cm  
180 180 cm  
210 210 cm  
240 240 cm  
270 270 cm  
300 300 cm

### Wiring

I Individual  
B Beginning  
M Middle  
E End

We reserve the right to make technical changes without prior notice