

LIGHTWAY 3 / OPAL RECESSED WITH TRIM

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls



Luminaire

Application:	Ambient
Body Material:	Extruded aluminium
Cutout:	Cutout: length - 11mm / width 38mm / depth 51mm


Optics

Surface Diffuser:	Acrylic Opal Diffusing Lens
-------------------	-----------------------------



Electrical equipment

Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



LOR: 61.7%

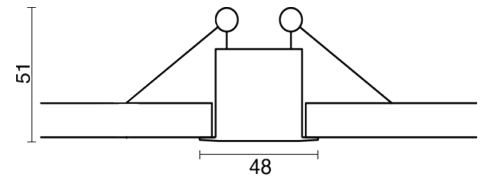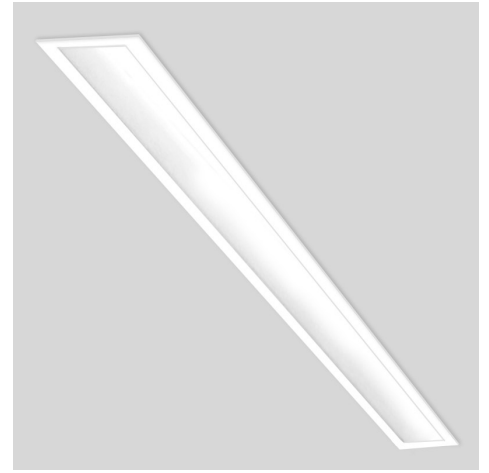

LIGHTWAY 3 / OPAL RECESSED WITH TRIM

Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>A O</u>	<u>X X</u>	-----	--	<u>2 0</u>	--	<u>I</u>	----	--
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	J		BS		30	I
					927L2	K		BT		60	B
					927L3	L		WS		90	M
					930L1	M		WT		120	E
					930L2			GS		150	
					930L3					180	
					940L1					210	
					940L2					240	
					940L3					270	
					9TWT1					300	
					9TWT2						
					9TWT3						

Family	Environment	Mounting	Optic	Beam Angle
L3 Lightway 3	I Indoor	RW Recessed With Trim	AO Opal Diffuser	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Layout
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <hr/> <p>Tunable White</p> <p>9TWT1: 10 W/m 1350 lm/m</p> <p>9TWT2: 15 W/m 1850 lm/m</p> <p>9TWT3: 22 W/m 2450 lm/m</p>	<p>J Remote driver, non-dimmable</p> <p>K Remote driver, DALI</p> <p>L Remote driver, 1-10V</p> <p>M Remote driver, Phase dimming</p>	20 IP20	<p>BS Black Smooth</p> <p>BT Black Textured</p> <p>WS White Smooth</p> <p>WT White Textured</p> <p>GS Gray Smooth</p>	II Shape

Length	Wiring
30 30 cm	I Individual
60 60 cm	B Beginning
90 90 cm	M Middle
120 120 cm	E End
150 150 cm	
180 180 cm	
210 210 cm	
240 240 cm	
270 270 cm	
300 300 cm	

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.