

ZINC BOLLARD / WASHER

SURFACE MOUNTED ANCHORAGE

The bollard marks a breakthrough in horizontal illumination, as it offers a flawless, uniform distribution for all ground surfaces. It is suitable for illuminating defined areas and wide pathways.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

Product Features:

- Homogeneous color mixing within one reflector
- IP 65
- True wall wash distribution. Vertical light uniformity (1:4)



Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Glass Cover:	Black Serigraphy

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors

Electrical equipment


Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



LOR: 73%


Mounting Ratio

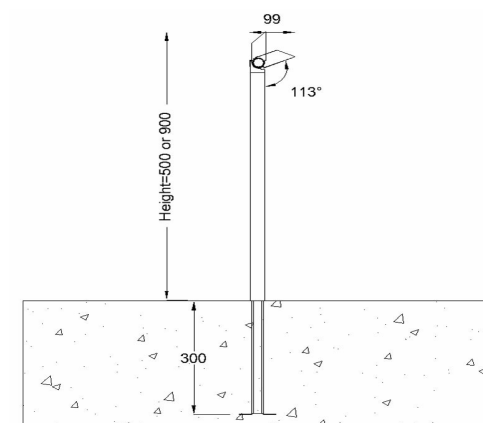

We reserve the right to make technical changes without prior notice

ZINC / WASHER

SURFACE MOUNTED ANCHORAGE



Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

ZINC / WASHER

SURFACE MOUNTED ANCHORAGE

Code Index:

<u>Z 3</u>	<u>B</u>	<u>O S A</u>	<u>W O</u>	<u>X X</u>	<u>-----</u>	<u>-</u>	<u>6 5</u>	<u>--</u>	<u>--</u>
Family	Product	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Height
					927M1	C		BS	50
					927M2	D		WS	90
					930M1	E		GS	
					930M2				
					940M1				
					940M2				

Family Z3 Zinc	Product B Bollard	Mounting OSA Surface Mounted Anchorage	Optic WO Cut-off Washer	Beam Angle XX N/A
------------------------------------	------------------------------------	---	--	------------------------------------

CRI/CCT & Power	Control	IP	Body Finish
<div>LED Load initial Lumen</div> <div>2700°K 927M1: 4.2 W 350 lm 927M2: 6 W 460 lm</div> <div>3000°K 930M1: 4.2 W 370 lm 930M2: 6 W 500 lm</div> <div>4000°K 940M1: 4.2 W 400 lm 940M2: 6 W 530 lm</div>	C Non-dimmable D DALI Dimmable E 1-10V Dimmable	65 IP65	BS Black Smooth WS White Smooth GS Gray Smooth

Height
50 50 cm
90 90 cm

We reserve the right to make technical changes without prior notice

