


# LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM

The Lightway 3 Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 3 Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Continuous rows or individual fixtures

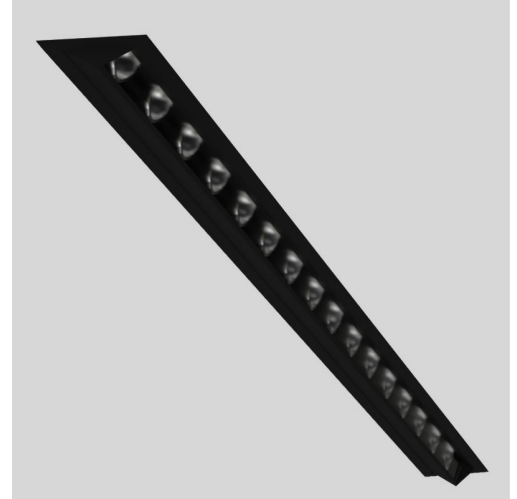

## Luminaire

**Application:** Washer  
**Body Material:** Extruded aluminium


## Optics

**Optic Type:** Asymmetrical Reflector

## Electrical equipment


**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curve




LOR: 40%

## Mounting Ratio

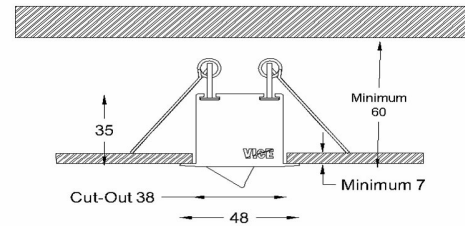

We reserve the right to make technical changes without prior notice

# LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 3 / CUT-OFF WASHER

## RECESSED WITH TRIM

### Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>W O</u>	<u>X X</u>	-----	-	<u>2 0</u>	--	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927S1	C		BS		15	I
					927S2	D		BT		30	B
					927S3	E		WS		60	M
					930S1			WT		90	E
					930S2			GS		120	
					930S3					150	
					940S1					180	
					940S2					210	
					940S3					240	
										270	
										300	

<b>Family</b> L3 Lightway 3	<b>Environment</b> I Indoor	<b>Mounting</b> RW Recessed With Trim	<b>Optic</b> WO Cut-off Washer	<b>Beam Angle</b> XX N/A
--------------------------------	--------------------------------	--	-----------------------------------	-----------------------------

<b>CRI/CCT &amp; Power</b>	<b>Control</b>	<b>IP</b>	<b>Body Finish</b>	<b>Layout</b>
LED Load    initial Lumen	C Non-dimmable	20 IP20	BS Black Smooth	I I Shape
<b>2700°K</b> 927S1: 4.2 W/ft    501 lm/ft	D DALI Dimmable		BT Black Fine Textured	
927S2: 6 W/ft    714 lm/ft	E 1-10V Dimmable		WS White Smooth	
927S3: 8.7 W/ft    999 lm/ft			WT White Textured	
<b>3000°K</b> 930S1: 4.2 W/ft    528 lm/ft			GS Gray Smooth	
930S2: 6 W/ft    756 lm/ft				
930S3: 8.7 W/ft    1056 lm/ft				
<b>4000°K</b> 940S1: 4.2 W/ft    567 lm/ft				
940S2: 6 W/ft    780 lm/ft				
940S3: 8.7 W/ft    1134 lm/ft				

<b>Length</b>
<b>15</b> 15 cm
<b>30</b> 30 cm
<b>60</b> 60 cm
<b>90</b> 90 cm
<b>120</b> 120 cm
<b>150</b> 150 cm
<b>180</b> 180 cm
<b>210</b> 210 cm
<b>240</b> 240 cm
<b>270</b> 270 cm
<b>300</b> 300 cm

<b>Wiring</b>
I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice

