

LIGHTWAY 5 / OPAL RECESSED WITH TRIM

The Lightway 5 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications. This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls
- Great color mixing capability



Luminaire


Application: Ambient
Body Material: Extruded aluminium
Cutout: Cutout: length - 0.5 inches / width 2.2 inches / depth 3.9 inches

Optics


Surface Diffuser: Acrylic Opal Diffusing Lens

Electrical equipment

Mains Voltage: 120-277VAC 60Hz
Control Gear Efficacy: > 85%

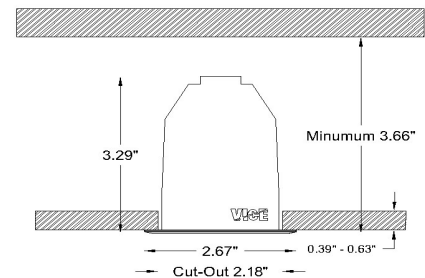

Polar Curve



LOR: 63.8%

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / OPAL

RECESSED WITH TRIM

Code Index:

<u>L 5</u>	<u>I</u>	<u>R W</u>	<u>A O</u>	<u>X X</u>	-----	-	<u>2 0</u>	--	<u>N</u>	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					835L1	P		BS			12	I
					835L2	R		BT			24	B
					835L3	Q		WS			36	M
					835L4			WT			48	E
					935L1			GS			60	
					935L2						70	
					935L3						82	
					935L4						93	
					927L1						105	
					927L2						116	
					927L3							
					927L4							
					927L5							
					930L1							
					930L2							
					930L3							
					930L4							
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family
L5 Lightway 5

Environment
I Indoor

Mounting
RW Recessed With Trim

Optic
AO Opal Diffuser

Beam Angle
XX N/A

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / OPAL RECESSED WITH TRIM

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927L1:	10 W/m	1500 lm/m
	927L2:	14 W/m	2100 lm/m
	927L3:	20 W/m	2900 lm/m
	927L4:	31 W/m	4300 lm/m
3000°K	930L1:	10 W/m	1600 lm/m
	930L2:	14 W/m	2170 lm/m
	930L3:	20 W/m	3000 lm/m
	930L4:	31 W/m	4350 lm/m
3500°K	935L1:	10 W/m	1600 lm/m
	935L2:	14 W/m	2200 lm/m
	935L3:	20 W/m	3050 lm/m
	935L4:	31 W/m	4430 lm/m
4000°K	940L1:	10 W/m	1650 lm/m
	940L2:	14 W/m	2300 lm/m
	940L3:	20 W/m	3150 lm/m
	940L4:	31 W/m	4600 lm/m
Tunable White	9TWT1:	10 W/m	1500 lm/m
	9TWT2:	15 W/m	
	9TWT3:	22 W/m	
80-2700	827L1:	10 W/m	1770 lm/m
	827L2:	14 W/m	2500 lm/m
	827L3:	20 W/m	3450 lm/m
	827L4:	31 W/m	5000 lm/m
80-3000	830L1:	10 W/m	1800 lm/m
	830L2:	14 W/m	2600 lm/m
	830L3:	20 W/m	3500 lm/m
	830L4:	31 W/m	5100 lm/m
80-3500	835L1:	10 W/m	1860 lm/m
	835L2:	14 W/m	2800 lm/m
	835L3:	20 W/m	3700 lm/m
	835L4:	31 W/m	5100 lm/m
80-4000	840L1:	10 W/m	1900 lm/m
	840L2:	14 W/m	2700 lm/m
	840L3:	20 W/m	3700 lm/m
	840L4:	31 W/m	5300 lm/m

Control

- P** Non-dimmable
- R** DALI Dimmable
- R** DALI Type 8
- Q** 1-10V Dimmable

IP

- 20** IP20

Body Finish

- BS** Black Smooth
- BT** Black Fine Textured
- WS** White Smooth
- WT** White Textured
- GS** Gray Smooth

Emergency

- N** No Emergency

Layout

- I** I Shape

Length

- 12** 12 in
- 24** 24 in
- 36** 36 in
- 48** 48 in
- 60** 60 in
- 70** 70 in
- 82** 82 in
- 93** 93 in
- 105** 105 in
- 116** 116 in

Wiring

- I** Individual
- B** Beginning
- M** Middle
- E** End