

Product Installation guide

IP65



-10 to 50°C



WORKING
TEMPERATURE



MAKE SURE THE POWER
IS OFF DURING INSTALLATION



220-240V~
50/60 Hz


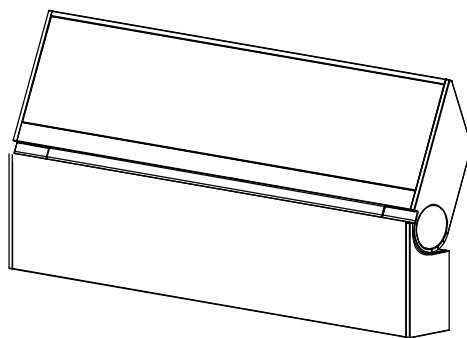


RISK OF FIRE AND ELECTRICAL SHOCK



1. Turn off the electrical power before starting the installation of the light fixture.
2. The feeding voltage must not exceed the specified fixture voltage.
3. This product must be installed by an eligible electrician.
4. Make sure the luminaire is mounted to a secure structure. Failure to mount the fixture correctly could result in serious injury.
5. Class 1 must be earthed in a reliable way.
6. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
7. Wear gloves and safety glasses at all times, moreover when removing the luminaire from the box, installing, servicing and performing its maintenance.
8. It is very important not to install a damaged product! This luminaire is properly packed to avoid being damaged during transit. Check for impaired objects before installation. Any damaged or broken item during or after assembly must be replaced.
9. Unauthorized repairs or modifications will void warranty.


L : 306 mm
600 mm
894 mm
1188mm

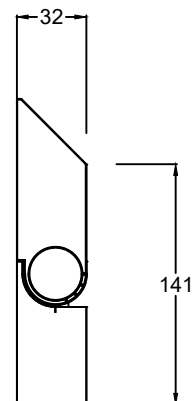


Dimensions in mm.

Product Installation guide


Mounting




- 1 Place the bracket in the desired location
Mark holes to be drilled with a pencil




- 2 Drill holes to prepare for dowels' insertion




- 3 Insert dowels

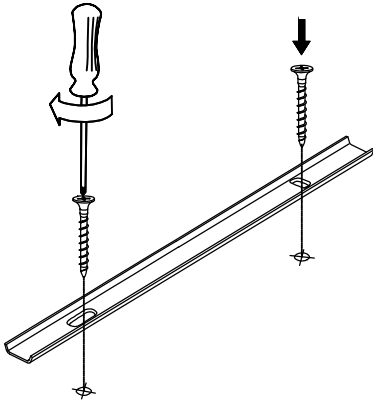

- 4 Place the bracket in the desired location
in the desired location

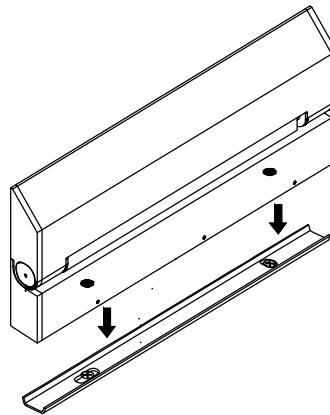


- 5 Position the luminaire in place




- 6 Fasten the luminaire using the provided set screw along with the Hex Key

Hidden Feeding

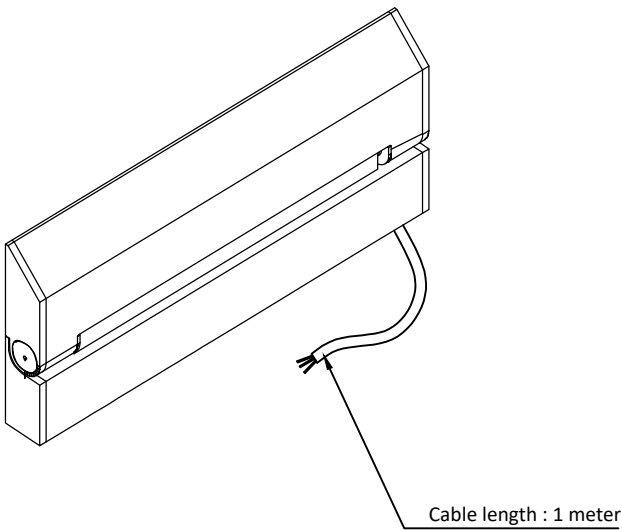

Back Feeding

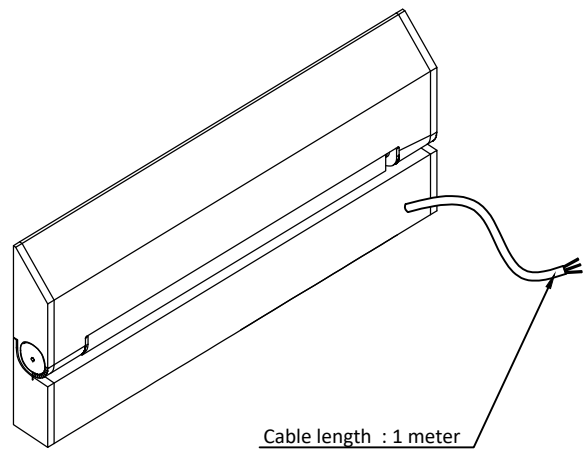


Product Installation guide

Wiring

Non dimmable fixtures are attached to a 3 pole cable.
The wiring to the main voltage should follow the color code below:

Line : Brown
Neutral : Blue
Ground : Yellow/ Green

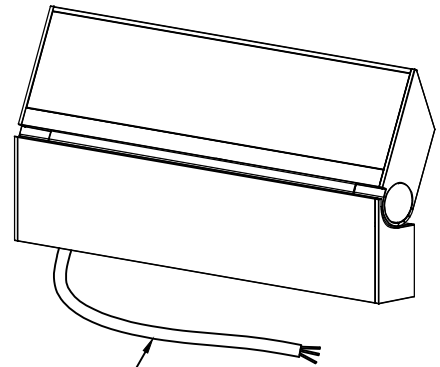


Cable length :1 meter

Dimmable fixtures (DALI or 1-10V) are attached to a 5 pole cable. The wiring to the main voltage should follow the below color code:

Line : Brown
Neutral : Blue
Ground : Yellow/ Green
DIM+ : Gray
DIM- : Black

Continuous Run

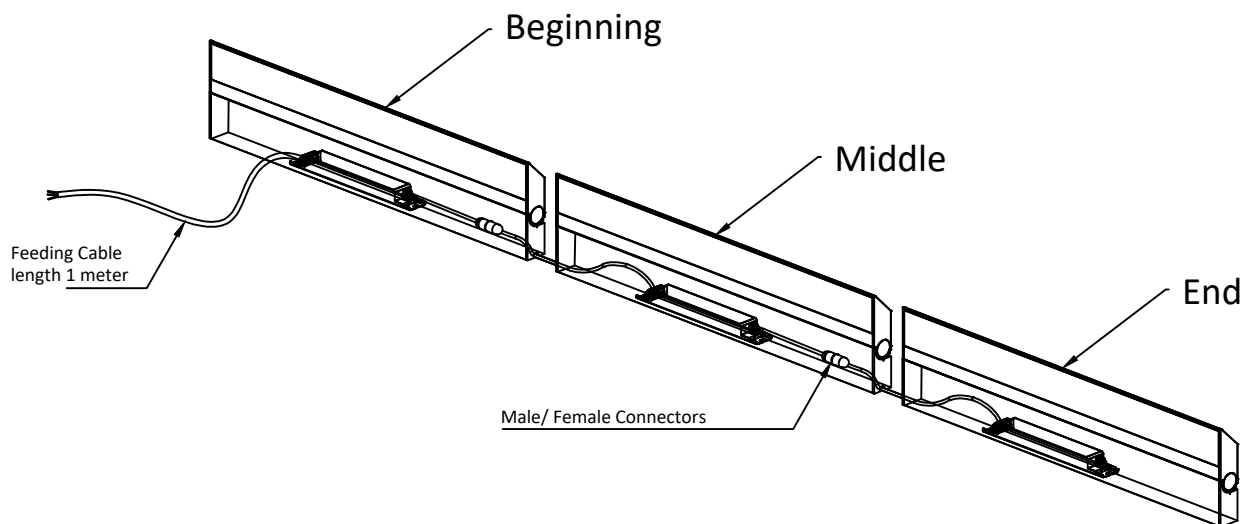

Do not connect more than 700W on a single run