
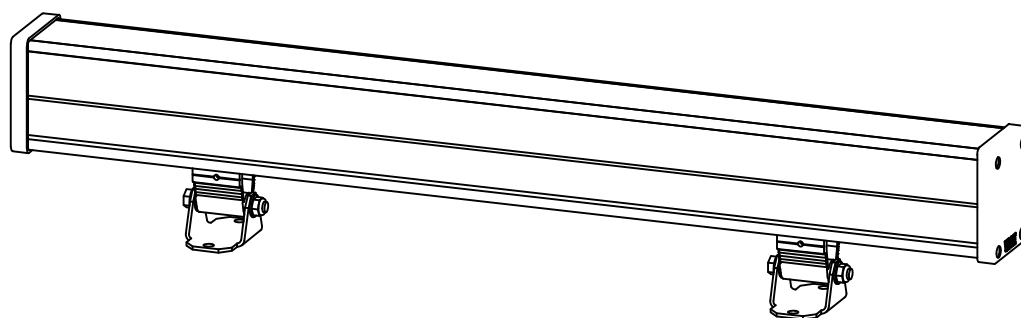


Product Installation guide

IP66





INSTALLATION INSTRUCTIONS



DISCLAIMER

1. Turn off electrical power before starting the installation of the light fixture.
2. The feeding voltage must not exceed the specified fixture voltage.
3. This product must be installed by an eligible electrician.
4. Make sure the luminaire is mounted to a secure structure. Failure to mount the fixture correctly could result in serious injury.
5. This luminaire is class 1, it must be earthed in a reliable way.
6. The light source of this is not replaceable, When light source reach the end of life the whole luminaire shall be replaced
7. Wear gloves and safety glasses at all times when removing the luminaire from carton, installing, servicing or performing maintenance
8. Do not install damaged product! This luminaire is properly packed to avoid being damaged during transit. Inspect to confirm before installation. Any damaged or broken part during or after assembly should be replaced.
9. Unauthorized repairs or modifications will void warranty.


Adjustable Bracket




Extended Adjustable Bracket



Floor Fixed Bracket




Floor Fixed Bracket-With Shield




Dimensions in mm.

*Shield is applicable for all mounting types

Brackets Assembly

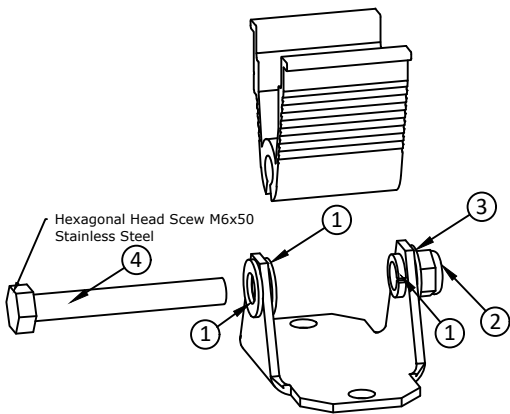


- ① Polycarbonate Washer (x3)
- ② Stainless Steel Prevailing torque Nut-M6 (x1)
- ③ Stainless Steel Spring Washer-M6 (x1)
- ④ Stainless Steel Hexagonal Head Screw-M6x45 (x1)

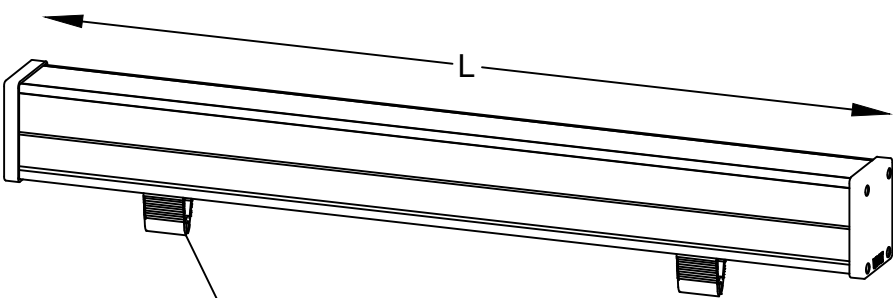


Fixture Code	Length=L
12	12.01 ±0.04 inch
24	23.70 ±0.04 inch
36	35.51 ±0.04 inch
48	47.32 ±0.04 inch


*Code Example:
L5 O ----- 12--




1. Add the polycarbonate washer provided with the fixture.



2. Add the base to the bracket




3. Slide the M6 Screw with install the spring Washer and fix it with a stop Nut.




4. Tighten the Screw .

Product Installation guide

Adjustable Brackets

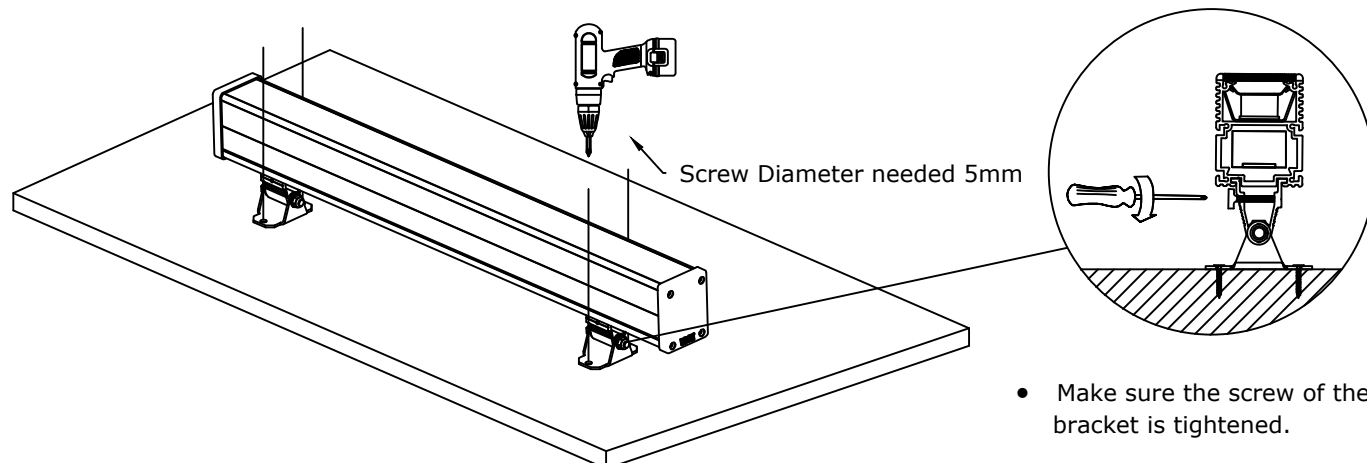


Floor Fixed Brackets

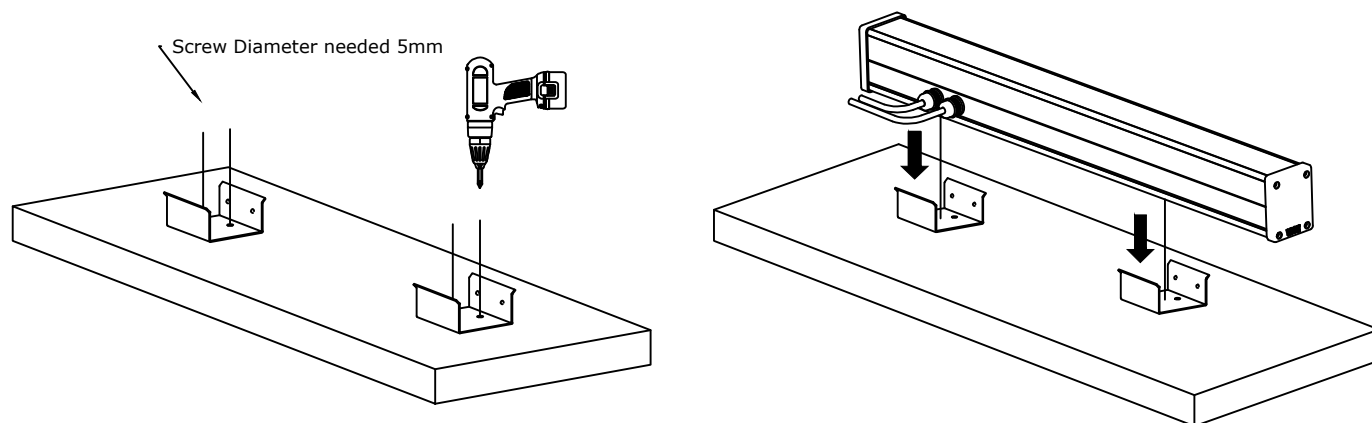


- Screw the brackets to the floor using an electrical hand driller than clip in the profile

Electrical Wiring for Individual fixture (Side View)

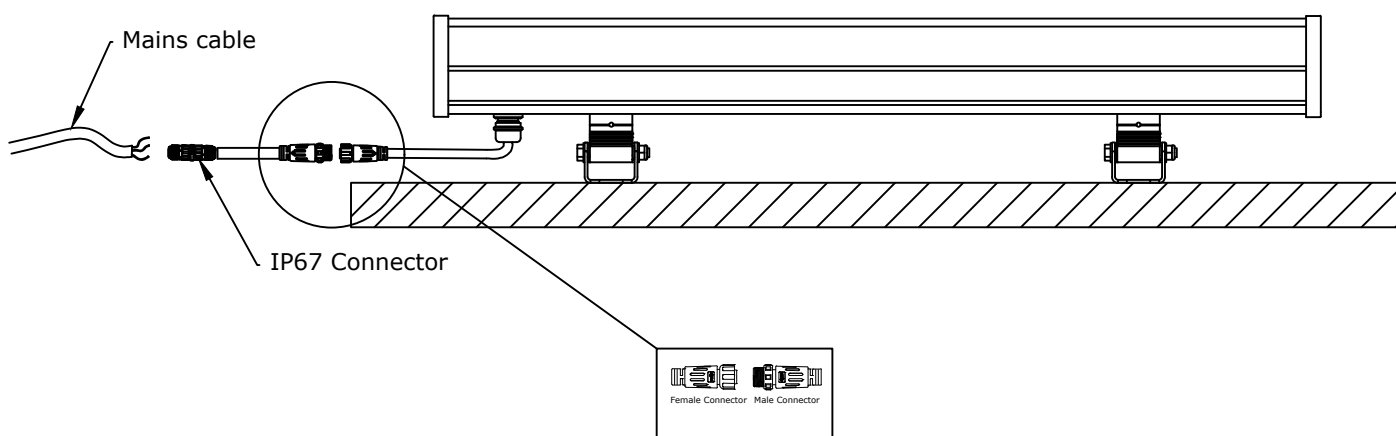


Electrical Wiring for continous run


For Non Dimmable

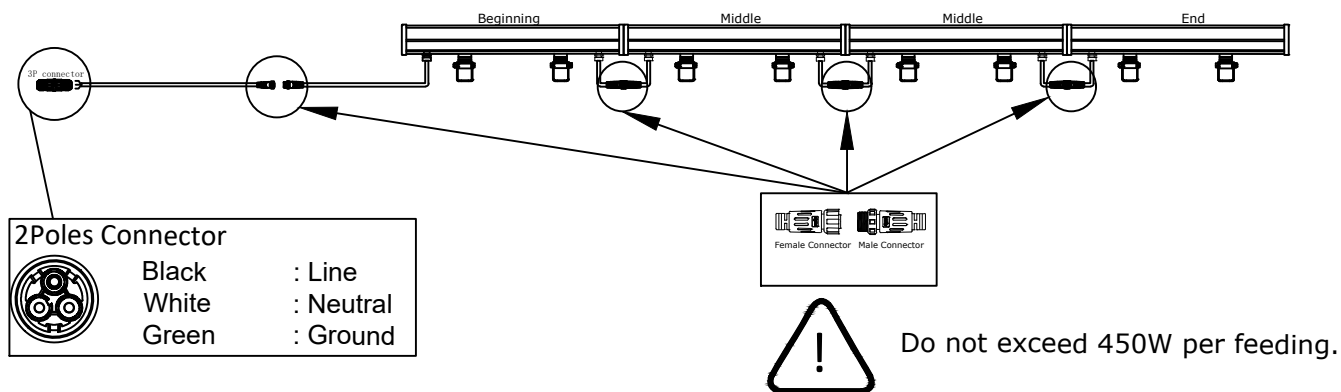

Dali or 0/1-10V Dimmable

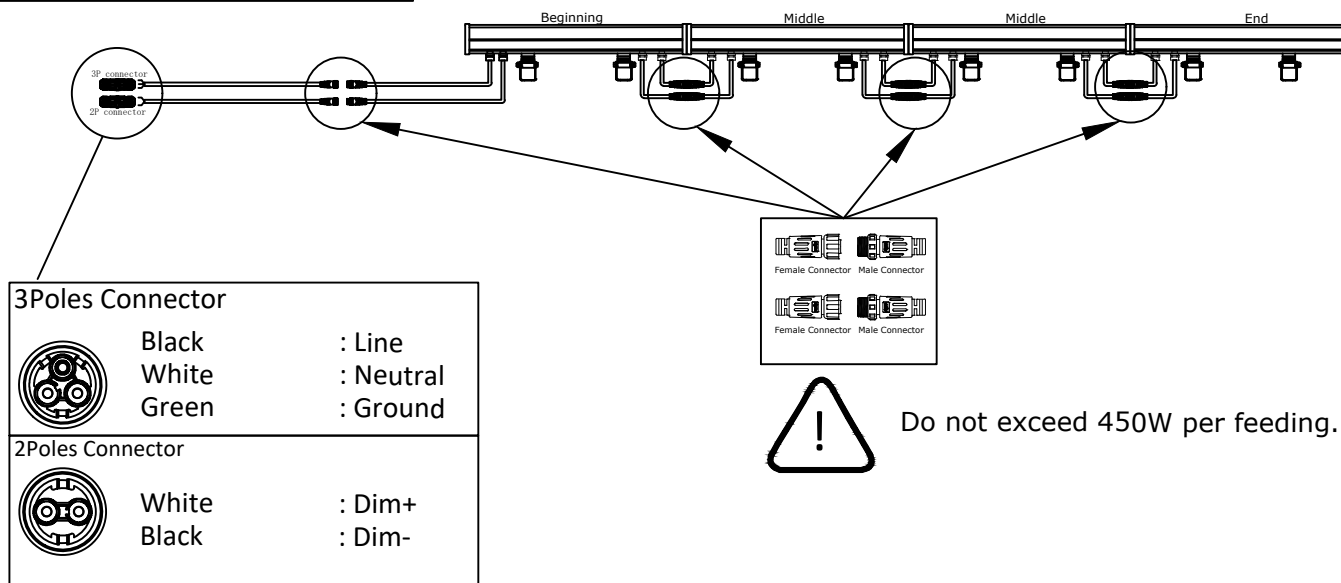

Light Direction For Asymmetrical Optics

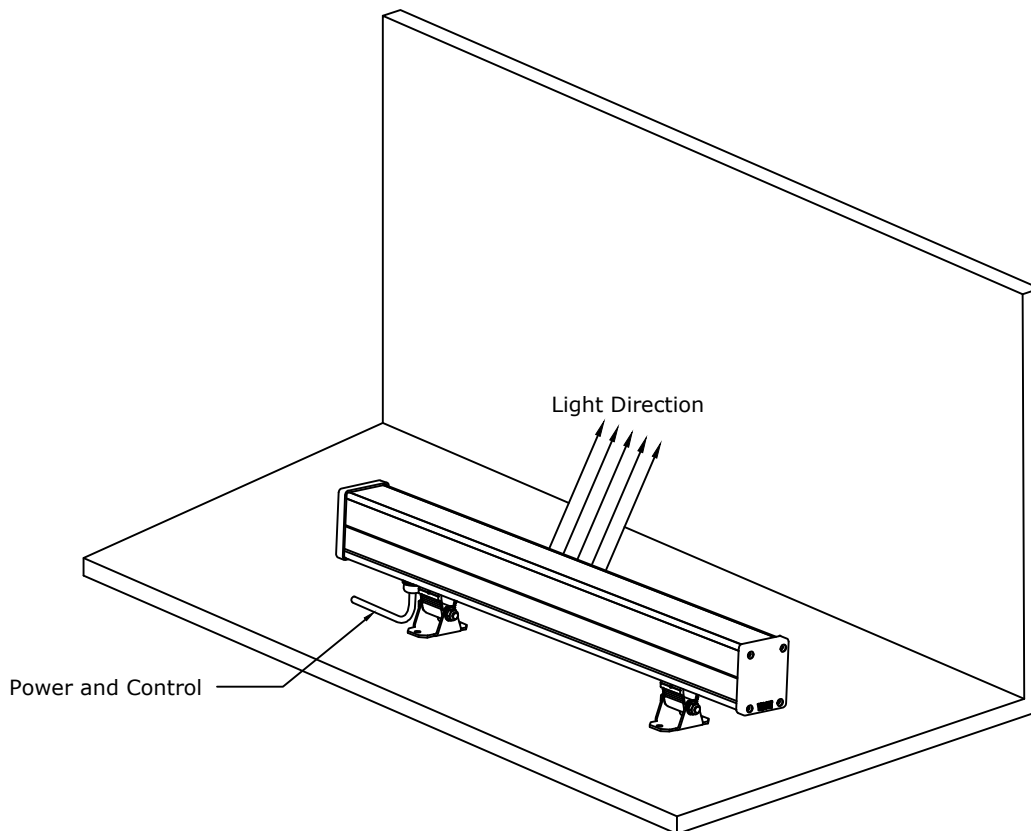

Light Direction For Fixtures with Shield

